



proflo[®]

electric storage specifications

(80-400L sizes)*

thinkversatile

dual handed plumbing

thinkdependable

larger sizes with a 7 year warranty

thinklongevity

*over 90 years of Australian
manufacturing expertise*





Why the Dux[®] electric storage systems are preferred

- Proflo[®] 80L backed by a 5 year tank warranty
- Proflo[®] 125, 160, 250, 315 & 400L backed by a 7 year tank warranty
- All tanks include 1 year full parts and labour warranty
- Full flow pressure to all taps
- Easy installation – water connections on both sides of tank
- Low maintenance and long service life
- Positive domed technology
- Versatile – same unit can be installed indoors or out
- Hard wearing, tough polymer end plates resist damage and moisture
- Available in single element (315L and 400L also available in twin element)
- Steel tank features rock-hard Duro-namel[®] vitreous enamel to maximise tank life and durability
- Dux is part of a publicly listed Australian company



Which Dux electric storage system is right for you?

NO. OF ADULTS & CHILDREN		CAPACITY
Cont. Tariff	Off Peak	
3 icons		80 L
4 icons		125 L
5 icons	2 icons	160 L
6 icons	3 icons	250 L
7 icons	4 icons	315 L
8 icons	5 icons	400 L

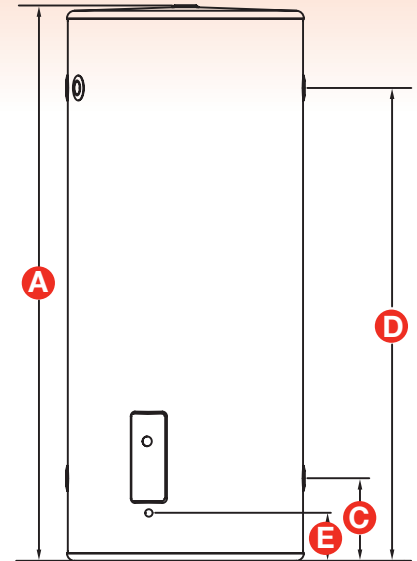

Adult icon can represent dishwasher or washing machine. An adult icon does not represent a spa bath.

DIMENSIONS	80	125	160	250	315	400
A Overall Height	925	1062	1317	1444	1754	1703
B Overall diameter	490	532	532	617	617	705
C Cold Water Inlet	175	206	206	215	215	240
D Hot Water Outlet	750	857	1112	1231	1541	1466
E Electrical Entry	80	116	116	125	125	150



All dual-handed for ease of installation

SPECIFICATIONS	80F1	125s1	160s1	250s1	315s1	315s2 TWIN ELEMENT	400s1	400s2 TWIN ELEMENT
Storage Capacity (L)	90	128	164	259	324	324	416	416
Hot Water Delivery Rating (L)	80	125	160	250	315	315	400	400
Twin Element Boost Capacity (L)	-	-	-	-	-	40	-	70
Element Sizes (kW)	1.8, 2.4, 3.6	1.8, 3.6	2.4, 3.6	3.6	3.6	2 x 3.6 or 2 x 4.8	3.6	2 x 3.6
Net Weight Empty (kg)	40	48	59	88	103	103	114	114
Relief Valve Pressure (kPa)	1400	1400	1400	1000	1000	1000	1000	1000

All heaters operate at 240V AC single phase electricity supply.

*Note: 25L and 50L sizes also available. Contact 1300 365 116 for more information.



©Dux Manufacturing Limited ABN 19 077 879 844. Lackey Rd, PO Box 209 Moss Vale, NSW 2577
The information supplied was correct at time of printing. Specification and materials may change without notice.
© and ™ indicate trademarks of Dux Manufacturing Limited. Dux Manufacturing Limited is part of a publicly listed Australian company.



GWA
Smarter Solutions