



## **Sharp 1500 1.5kW Solar System Panel Specifications**

Your Sharp 1500 system will be supplied with one of the following sets of panels:

<b>Manufacturer</b>	<b>Mono Or Poly</b>	<b>Size (Watts)</b>	<b>Panels Required To Achieve Minimum 1500 Watts</b>
Sharp	Mono	188	8
Sharp	Poly	215	7
Sharp	Poly	220	7

Please note all solar panels supplied are CEC accredited and compliant with IEC/EN61730 and IEC/EN61215 or IEC/EN61646.

The choice of panels will be at the **sole discretion** of our installer subject to such matters as stock availability.

Please see the following specification sheet for further details and panel specifications.

# 188 WATT

**BIG POWER,  
SMALL FOOTPRINT**



## FEATURES

- High-power module (188W) using 156.5mm square single crystal silicon solar cells with 14.24% module conversion efficiency
- Photovoltaic module with bypass diode minimises the power drop caused by shade
- Textured cell surface to reduce the reflection of sunlight and BSF (Back Surface Field) structure to improve cell conversion efficiency: 15.99%
- White tempered glass, EVA resin and a weatherproof film, plus aluminum frame for extended outdoor use
- Output terminal: Lead wire with waterproof connector
- Certifications: IEC 61215 and IEC 61730
- SHARP modules are manufactured in ISO 9001 certified factories

## SINGLE CRYSTAL SILICON PHOTOVOLTAIC MODULE WITH 188W MAXIMUM POWER

This single crystal 188Watt module features 15.99% encapsulated cell efficiency and 14.24% module efficiency. Using breakthrough technology perfected in Sharp's space cell program, the **NU-A188EY** module allows for maximum usable power per square metre of solar array.

A safe, clean, reliable source of energy, Sharp's NU-A188EY photovoltaic module is designed for large electrical power requirements. Based on the technology of crystal silicon solar cells developed for 50 years, this module has superb durability to withstand rigorous operating conditions and is suitable for grid connected systems.

Common applications for the Sharp NU-A188EY include residences, office buildings, solar power stations and solar suburbs. As the world's leading manufacturer of photovoltaic modules, Sharp produces an extensive line of high power modules for every electrical power requirement.

**SHARP**

# NU-A188EY – MAXIMUM POWER

## ELECTRICAL CHARACTERISTICS

Cell	48 Monocrystalline (156.5mm) <sup>2</sup> Sharp silicon solar cells
No. of Cells and Connections	48 in series
Open Circuit Voltage (Voc)	29.6V
Maximum Power Voltage (Vpm)	24V
Short Circuit Current (Isc)	8.60A
Maximum Power Current (Ipm)	7.84A
Maximum Power (Pm) <sup>1</sup>	Min. 179W Typical 188W
Encapsulated Solar Cell Efficiency (ηc)	15.99%
Module Efficiency (ηm)	14.24%
Maximum System Voltage	DC 800V
Series Fuse Rating	15A
Type of Output Terminal	Lead Wire with MC Connector

Specifications are subject to change without notice  
<sup>1</sup> (STC) Standard Test Conditions: 25°C, 1 kW/m<sup>2</sup>, AM 1.5

## MECHANICAL CHARACTERISTICS

Dimensions	1328 x 994 x 57.5mm
Weight	16.5kg




## TEMPERATURE COEFFICIENT

Temp. Coefficient of Pmax	-0.485	% / °C
Temp. Coefficient of Voc	-0.104	V / °C
Temp. Coefficient of Isc	0.053	% / °C

## ABSOLUTE MAXIMUM RATINGS


Parameters	Rating	Unit
Operating Temperature	-40 to +90	°C
Storage Temperature	-40 to +90	°C
Dielectric Voltage Withstood	5,200 max.	V-DC

## IV CURVES

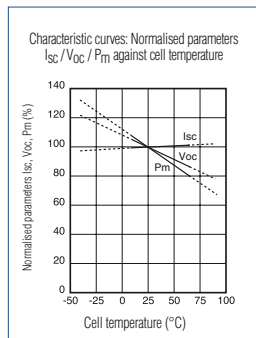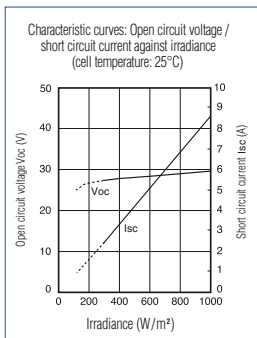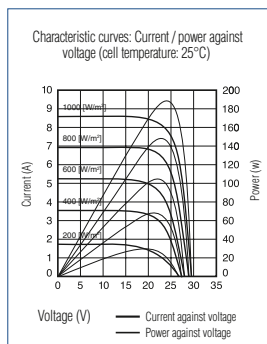

Specifications are subject to change without notice

## DIMENSIONS

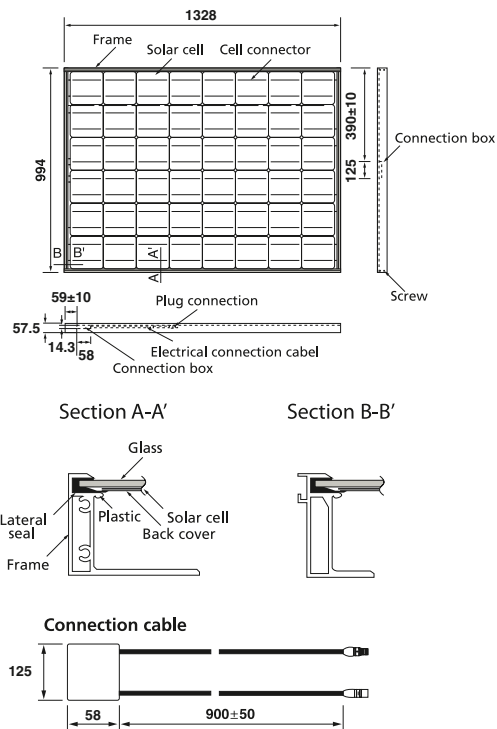


Specifications are subject to change without notice

In the absence of confirmation by device specifications sheets, Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices shown in catalogues, data books, etc. Contact Sharp in order to obtain the latest device specification sheets before using any Sharp device.

**SHARP**

Sharp Corporation of Australia  
 1 Huntingwood Drive, Huntingwood, NSW 2148.  
 Phone: (02) 9830 4600 E-mail: sales@sharp.net.au  
 www.sharp.net.au

**SHARP**  
 Solar



# 215 WATT

**BIG POWER,  
SMALL FOOTPRINT**



## FEATURES

- High-power module (215W) using 156.5mm square multi crystal silicon solar cells with 13.1% module conversion efficiency
- Photovoltaic module with bypass diode minimises the power drop caused by shade
- Textured cell surface to reduce the reflection of sunlight and BSF (Back Surface Field) structure to improve cell conversion efficiency: 14.6%
- White tempered glass, EVA resin and a weatherproof film, plus aluminum frame for extended outdoor use
- Output terminal: Lead wire with waterproof connector
- Certifications: IEC 61215 & IEC 61730
- SHARP modules are manufactured in ISO 9001 certified factories

## MULTI CRYSTAL SILICON PHOTOVOLTAIC MODULE WITH 215W MAXIMUM POWER

This multi crystal 215watt module features 14.6% encapsulated cell efficiency and 13.1% module efficiency. Using breakthrough technology perfected in Sharp's space cell program, the **ND-F215A1** module allows for maximum usable power per square metre of solar array.

A safe, clean, reliable source of energy, Sharp's ND-F215A1 photovoltaic module is designed for large electrical power requirements. Based on the technology of crystal silicon solar cells developed over 45 years, this module has superb durability to withstand rigorous operating conditions and is suitable for grid connected systems.

Common applications for the Sharp ND-F215A1 include residences, office buildings, solar power stations and solar suburbs. As the world's leading manufacturer of photovoltaic modules, Sharp produces an extensive line of high power modules for every electrical power requirement.

**SHARP**

# ND-F215A1 – MAXIMUM POWER

## ELECTRICAL CHARACTERISTICS

Cell	156.5mm Square Polycrystalline silicon
No. of Cells and Connections	60 in series
Open Circuit Voltage (Voc)	36.7V
Maximum Power Voltage (Vpm)	30.2V
Short Circuit Current (Isc)	7.82A
Maximum Power Current (Ipm)	7.13A
Maximum Power (Pm) <sup>1</sup>	Typical 215W
Encapsulated Solar Cell Efficiency (ηc)	14.6%
Module Efficiency (ηm)	13.1%
Maximum System Voltage	DC 1000V
Series Fuse Rating	15A
Type of Output Terminal	Lead Wire with MC3 Connector

Specifications are subject to change without notice  
<sup>1</sup> (STC) Standard Test Conditions: 25°C, 1 kW/m<sup>2</sup>, AM 1.5

## MECHANICAL CHARACTERISTICS

Dimensions	994 x 1652 x 46mm
Weight	21.0kg



## TEMPERATURE COEFFICIENT

Temp. Coefficient of Pmax	-0.485	% / °C
Temp. Coefficient of Voc	-0.13	V / °C
Temp. Coefficient of Isc	0.053	% / °C

## ABSOLUTE MAXIMUM RATINGS


Parameters	Rating	Unit
Operating Temperature	-40 to +90	°C
Storage Temperature	-40 to +90	°C
Dielectric Voltage Withstood	3000 max.	V-DC

## IV CURVES

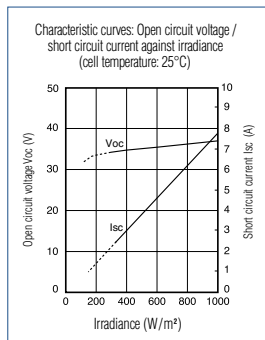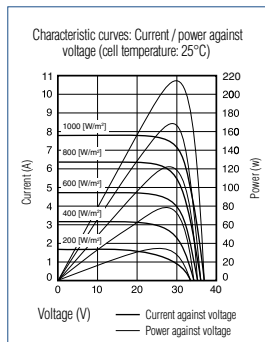

Specifications are subject to change without notice

## DIMENSIONS

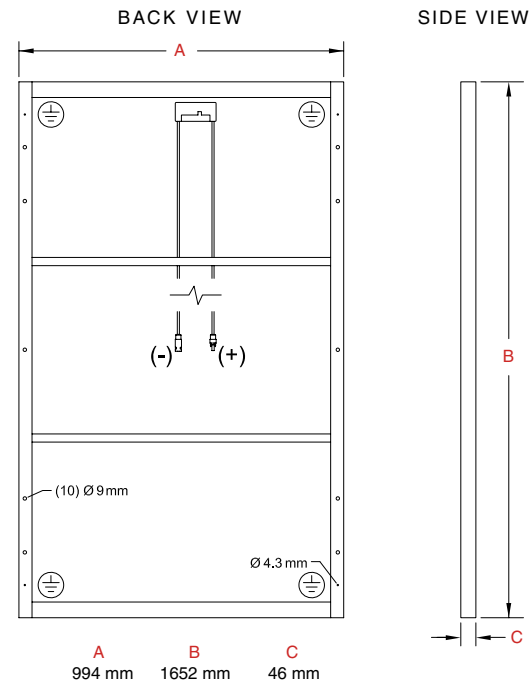

Specifications are subject to change without notice

In the absence of confirmation by device specifications sheets, Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices shown in catalogues, data books, etc. Contact Sharp in order to obtain the latest device specification sheets before using any Sharp device.


- Design and specifications are subject to change without prior notice.
- Colour variations to products may occur due to printing.
- All information and technical details are correct as at product release date.

# SHARP

**SHARP CORPORATION OF AUSTRALIA PTY LTD**  
 ABN 40 003 039 405  
 1 Huntingwood Drive, Huntingwood, NSW 2148  
 PO Box 6827, Blacktown, NSW 2148  
 Tel: (02) 9830 4600 Fax: (02) 9672 1208  
 www.sharp.net.au

# SHARP

Solar



# 220 WATT

**BIG POWER,  
SMALL FOOTPRINT**



## FEATURES

- High-power module (220W) using 156.5mm square multi crystal silicon solar cells with 13.4% module conversion efficiency
- Photovoltaic module with bypass diode minimises the power drop caused by shade
- Textured cell surface to reduce the reflection of sunlight and BSF (Back Surface Field) structure to improve cell conversion efficiency: 15%
- White tempered glass, EVA resin and a weatherproof film, plus aluminum frame for extended outdoor use
- Output terminal: Lead wire with waterproof connector
- Certifications: IEC 61215 & IEC 61730
- SHARP modules are manufactured in ISO 9001 certified factories

## MULTI CRYSTAL SILICON PHOTOVOLTAIC MODULE WITH 220W MAXIMUM POWER

This multi crystal 220watt module features 15% encapsulated cell efficiency and 13.4% module efficiency. Using breakthrough technology perfected in Sharp's space cell program, the **ND-220E1F** module allows for maximum usable power per square metre of solar array.

A safe, clean, reliable source of energy, Sharp's ND-220E1F photovoltaic module is designed for large electrical power requirements. Based on the technology of crystal silicon solar cells developed over 45 years, this module has superb durability to withstand rigorous operating conditions and is suitable for grid connected systems.

Common applications for the Sharp ND-220E1F include residences, office buildings, solar power stations and solar suburbs. As the world's leading manufacturer of photovoltaic modules, Sharp produces an extensive line of high power modules for every electrical power requirement.

**SHARP**

# ND-220E1F – MAXIMUM POWER

## ELECTRICAL CHARACTERISTICS

Cell	156.5mm Square Polycrystalline silicon
No. of Cells and Connections	60 in series
Open Circuit Voltage (Voc)	36.5V
Maximum Power Voltage (Vpm)	29.2V
Short Circuit Current (Isc)	8.20A
Maximum Power Current (Ipm)	7.54A
Maximum Power (Pm) <sup>1</sup>	Typical 220W
Encapsulated Solar Cell Efficiency (ηc)	15%
Module Efficiency (ηm)	13.4%
Maximum System Voltage	DC 1000V
Series Fuse Rating	15A
Type of Output Terminal	Lead Wire with MC3 Connector

Specifications are subject to change without notice  
<sup>1</sup> (STC) Standard Test Conditions: 25°C, 1 kW/m<sup>2</sup>, AM 1.5

## MECHANICAL CHARACTERISTICS

Dimensions	994 x 1652 x 46mm
Weight	21.0kg



## TEMPERATURE COEFFICIENT

Temp. Coefficient of Pmax	-0.485	% / °C
Temp. Coefficient of Voc	-0.13	V / °C
Temp. Coefficient of Isc	0.053	% / °C

## ABSOLUTE MAXIMUM RATINGS


Parameters	Rating	Unit
Operating Temperature	-40 to +90	°C
Storage Temperature	-40 to +90	°C
Dielectric Voltage Withstood	3000 max.	V-DC

## IV CURVES

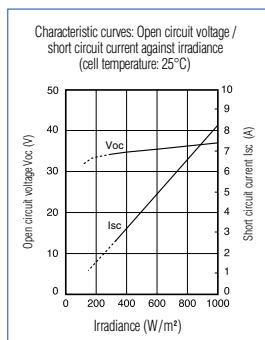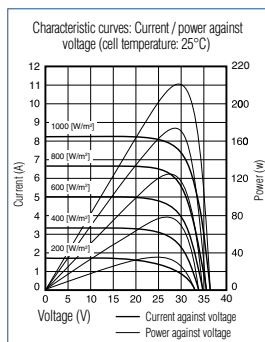

Specifications are subject to change without notice

## DIMENSIONS

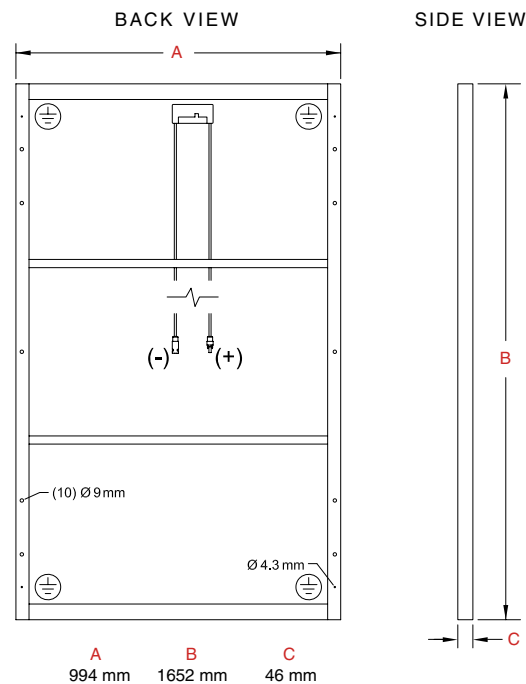

Specifications are subject to change without notice

In the absence of confirmation by device specifications sheets, Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices shown in catalogues, data books, etc. Contact Sharp in order to obtain the latest device specification sheets before using any Sharp device.

- Design and specifications are subject to change without prior notice.
- Colour variations to products may occur due to printing.
- All information and technical details are correct as at product release date.

# SHARP

**SHARP CORPORATION OF AUSTRALIA PTY LTD**  
 ABN 40 003 039 405  
 1 Huntingwood Drive, Huntingwood, NSW 2148  
 PO Box 6827, Blacktown, NSW 2148  
 Tel: (02) 9830 4600 Fax: (02) 9672 1208  
[www.sharp.net.au](http://www.sharp.net.au)

# SHARP

Solar

