




RHEEM 4 STAR GAS STORAGE WATER HEATER



		1 - 5	90, 135 & 170L	7 YEAR
GAS	4 STAR	PEOPLE	CAPACITY	WARRANTY¹

FEATURES

- **4 Star energy efficiency** – uses less gas than 3 Star water heaters, to save on energy costs
- **Mains pressure** at multiple taps – to service multiple hot water demands at once
- **Easy replacement** – common fittings with standard 3 Star models allow fast, low cost replacement
- **7 Year warranty¹**
- 90L, 135L & 170L capacities

WHY CHOOSE RHEEM GAS STORAGE HOT WATER?

- Range includes 4 & 5 Star energy rated models² – options that save you money and lower your carbon footprint when replacing a 3 Star gas storage water heater
- Designed for Australia's tough conditions, backed by 70 years of Rheem water heating know how
- Capacities to suit most family sizes and hot water requirements
- Mains Pressure water delivery for steady, hot and strong® hot water
- Full technical support through Rheem's National Service Network
- Available to suit Natural Gas or Propane






RHEEM 4 STAR GAS STORAGE WATER HEATER

MAINS PRESSURE HOT WATER WHEN YOU NEED IT

Mains pressure gas storage water heaters are your guarantee of consistent hot water. You can be sure of a strong flow of hot water, even to multiple taps at once.

With a range of capacities, there is a model for every budget and family, and Rheem's modern design complements any home.

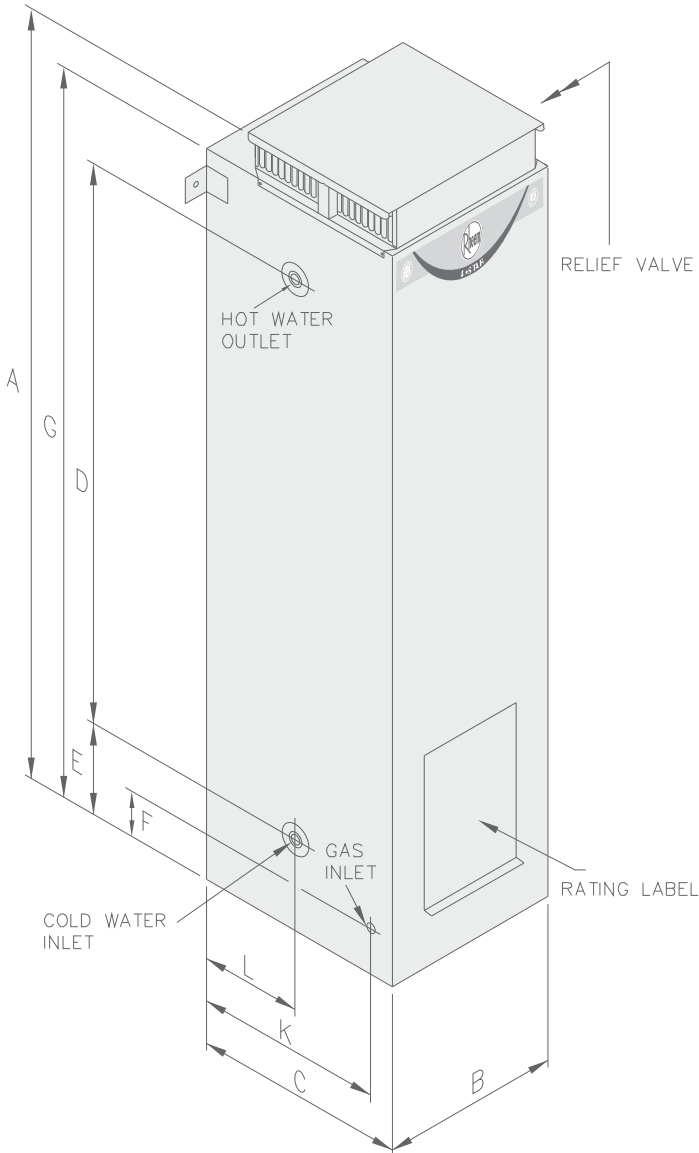

MODEL		RHEEM 4 STAR GAS		
		90L	135L	170L
		347090NO/PO	347135NO/PO	347170NO/PO
Number of People				
Moderate Climate		1-3	2-4	3-5
Cool Climate		1-2	2-3	3-4
Warranty ¹	Years	7	7	7
Gas Type		Natural Gas/Propane		
Gas Energy Rating	Stars	4.1	4.3	4
Storage Capacity	Litres	90	135	170
Recovery Rate @ 45°C rise	L/Hr	100	117	117
First Hour Capacity	Litres	190	252	287
Natural Gas	MJ/Hr	25	27	27
Dimensions				
A	mm	1158	1558	1858
B	mm	422	422	422
C	mm	502	502	502
D	mm	588	988	1213
E	mm	328	328	403
F	mm	298	298	298
G	mm	1078	1478	1778
K	mm	473	473	473
L	mm	208	208	208
Weight Empty	kg	48	59	69
Relief Valve Setting	kPa	1400	1400	1400
Expansion Control Valve Setting	kPa	1200	1200	1200
Max. Water Supply Pressure				
with ECV [#]	kPa	960	960	960
without ECV	kPa	1120	1120	1120
Water Connection		RP 3/4/20	RP 3/4/20	RP 3/4/20
Gas Connection		RP 1/2/15	RP 1/2/15	RP 1/2/15

Must be installed with the back of the water heater against a wall. Minimum distances from the flue terminal to openings into a building, corners and return walls apply.

¹ **Warranty Conditions.** 7 Years on Cylinder, 3 Years Labour on Cylinder, 1 Year Parts & Labour warranty on all other components, for Domestic (non-Commercial) installations.

² For details of all Rheem Gas Storage Hot Water models visit www.rheem.com.au.

[#] ECV not supplied with water heater.

Materials and specifications are subject to change without notice.

^o Registered Trademark of Rheem Australia Pty Ltd.



Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 6, Rydalmere, New South Wales 2116, Australia.

INSTALL A

